
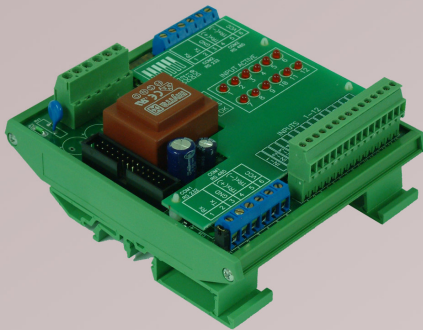


INPUT CONTROLLER

IN12

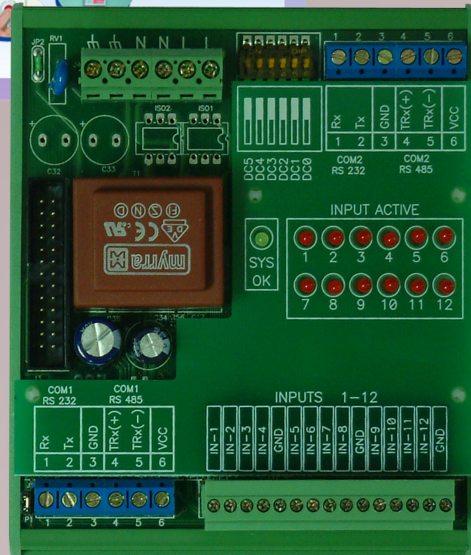

- SMALL SIZE 103x118x53 mm
- DIN RAIL COMPATIBLE
- EASY INSTALLATION
- MICRO-CONTROLLER BASED
- UP TO 20 PROGRAMMABLE SCENARIOS
- EACH SCENARIO CAN BE PROGRAMMED TO BE OPERATED AUTOMATICALLY BY LOGIC FUNCTION
- TWO RS232 / RS485 COMMUNICATION PORTS
- BAUD RATE 1200 to 115200 Kb/sec
- MANUAL and COMPUTER PROGRAMMING
- UP TO 63 CONTROLLERS IN ONE COMMUNICATION PORT
- THREE COMMUNICATION ADDRESSES:
 - INDIVIDUAL DIP-SWITCH
 - GROUP No. of CONTROLLERS
 - GLOBAL ALL CONTROLLERS
- 12 DIGITAL AND ANALOG INPUTS
- AC POWER OPERATION 220V/50Hz (110V/60Hz on Request)
- CONTROLLER CAN OPERATE AS MASTER or SLAVE
- ACTIVITY STATUS INDICATOR FOR EACH INPUT
- SYS-OK/POWER STATUS INDICATOR

IN12 TYPICAL CONNECTIONS

